



PC/GB04/04328



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport

South Wales 26 OCT 2004

NP10 800

WIPO

PCT

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 19 October 2004

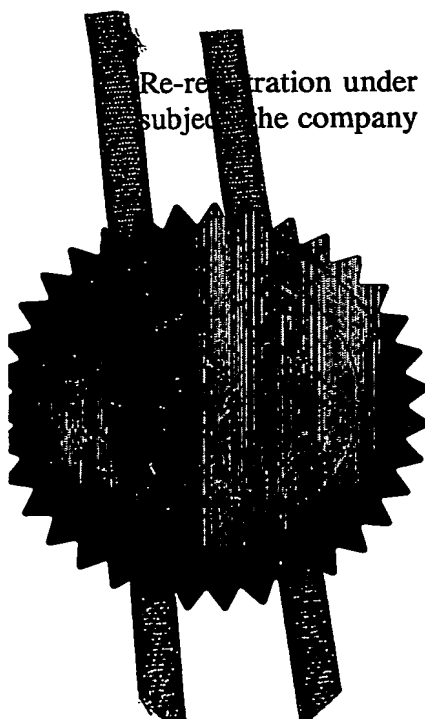

Patent Act 1977  
(Rule 10)

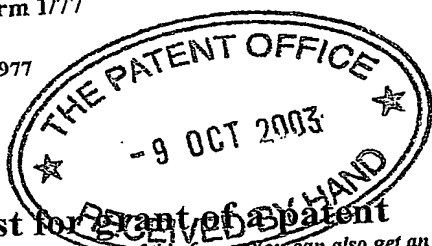

# The Patent Office

100CT03 2843503 1 0010387  
P01/7700 0-00-0322697.3  
1777

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

9 OCT 2003

1. Your reference

P511580GB/70532

2. Patent application number

(The Patent Office will fill in this part)

0323697.3

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Janile Limited  
25a Bromfelde Road  
London  
SW4 6PP  
United Kingdom

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

08730418001  
United Kingdom

4. Title of the invention

Extendible Mast

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

WITHERS & ROGERS  
Goldings House  
2 Hays Lane  
London  
SE1 2HW

Patents ADP number (if you know it)

1776001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

No

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	8	/
Claim(s)	2	/
Abstract	1	/
Drawing (s)	3	+ 2 /

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature *Withers & Rogers* Date 9 October 2003

12. Name and daytime telephone number of person to contact in the United Kingdom TOMBLING, ADRIAN GEORGE 020 7 663 3500

# Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

# Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500 505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

# **Extendible Mast**

The invention relates to an extendible mast particularly for supporting a camera.

5

When a builder needs to assess a roof, or the upper part of a building he usually needs to erect and mount scaffolding in order to gain access to the part to be assessed. Often he will find that there is a problem with part of the roof, that the roof requires maintenance work, but that in order to have the best access to that part of the roof he

10 needs to move the scaffolding. This is time consuming and increases the overall cost of the maintenance work. It would be helpful to have a way of assessing the roof, or upper part of a building without having to erect and mount scaffolding or directly access the roof.

15 Masts and other support units for supporting detection devices such as cameras, lights, infra red detectors and smoke or chemical pollution detectors are known in the art. Cameras may be mounted on large tripods, or on cranes, and are sometimes mounted on masts on vehicles. However such support units have two main disadvantages. The support units are either too unstable to be used above a certain height, the unit being

20 susceptible to serious damage by wind, and being incapable of accurately positioning the camera; or are too cumbersome to be easily portable. In order to be strong enough to withstand windy conditions the support units are heavy. This makes them difficult to transport and erect. Hence some of the support units are mounted on vehicles. This solves the problem of transporting the support unit, but, due to the size of the vehicle,

25 limits the locations in which the support unit can be used. For example, the support unit cannot be used in narrow passageways between buildings. Vehicle-mounted masts are expensive because, to the cost of the mast must be added the cost of buying and maintaining the vehicle. It would be useful to have a support unit, which could be used to mount a camera, which is both strong and easily portable without a vehicle.

30

The invention provides a freestanding, portable, extendible mast arranged to support a detection device, comprising a plurality of telescopic sections each being moveable

between a stored position and an extended position, wherein the mast is between 30 feet (8.5m) and 130 feet (37m) in length when all the sections are fully extended.

- 5 By freestanding it is meant that the mast does not need to be mounted on a separate base or vehicle.

By portable, it is meant that the mast can be moved, at least for short distances, by hand, without needing a vehicle.

10

By telescopic, it is meant that the sections of the mast overlap, and the amount of overlap may be altered between the stored and extended positions.

- Such a mast may be used to raise a camera, or other device above a roof or alongside a building, or into the canopy of a tree to allow the area to be viewed without erecting scaffolding.
- 15

- Preferably the mast is between 50 feet (14m) and 100 feet (28m) in length when all the sections are in the elongated position, more preferably between 65 feet (18.5) and 85 feet (24.5). The mast preferably weighs between 2.5 and 3.5 hundred weight, more preferably approximately 3 hundred weight which allows it to be carried by one or two people.
- 20

- The mast preferably has up to 10 sections, most preferably between 5 and 8 sections.
- 25 The sections are preferably substantially equal in length, and fit one inside another. The diameters are chosen such that the sections can be moved in relation to one another, that is to say the sections do not fit tightly together. The diameter of the widest section is preferably between 5 and 9 inches wide, more preferably between 6 and 8 inches wide. Most preferably it is 7 inches wide. Each section is preferably between 11 and 13 feet
- 30 in length. When elongated there is preferably between 1 and 3 feet of overlap between one section and another.

Preferably the mast is moveable between the stored position and the extended position by hand. The mast is preferably provided with a hand driven drive mechanism, most preferably a chain and sprocket wheel arrangement to allow extension of the sections.

5 The chain and sprocket wheel arrangement preferably comprises a chain and two sprocket wheels and may include a cranked handle which can be used to turn one of the sprocket wheels, and hence drive the chain. The handle may be linked directly to one of the sprocket wheels, or may be linked to a transfer unit by a second similar chain. The transfer unit includes first and second sprocket wheels which rotate together. The first  
10 wheel is turned by the second chain, and the second wheel drives the first chain. Turning the first sprocket wheel with the second chain turns the second sprocket wheel. The drive mechanism may be geared by using first and second sprocket wheels of different sizes to make extending the sections easier. Alternatively the drive mechanism may include hydraulic apparatus for extension of the sections.

15

The drive mechanism also preferably includes a braking mechanism, to allow the mast to be extended or returned to the stored position safely. The brake mechanism may be applied when a section is partially extended, to prevent the section falling back towards the stored position. The mechanism may be a simple brake which can be applied to the  
20 drive mechanism. For example, when the drive mechanism is a chain and sprocket, the braking mechanism may be in the form of a ratchet pawl which engages the chain to prevent the section from dropping.

Each section, with the possible exception of the innermost section, is preferably  
25 provided with a longitudinal slot, in the section wall, to provide access to the inner sections. The apertures are aligned with one other. Further each of the sections, except the outermost, is preferably provided with an aperture for receiving a pin to link the sections to the drive mechanism in order to extend them. In the most preferred embodiment, each section except the innermost section has a longitudinal slot on  
30 diametrically opposing sides so that the pin can pass right through the mast. Also in the most preferred embodiment each section except the innermost section has an aperture on diametrically opposing sides so that the pin can pass right through the mast.

In the preferred embodiment, not only do the longitudinal slots align, but the apertures also align with those slots. In addition, the apertures are arranged such that, when the mast is in the stored position, the apertures of each of the sections are arranged so that each of them can be seen separately through the slot in the outermost section. The  
5 aperture of the innermost section is arranged at the top so that it will be the first section to be lifted by the pin. Each aperture beneath that of the innermost section corresponds to the next outermost section.

The drive mechanism preferably includes a linker in the chain for linking the  
10 mechanism to section to be extended. The linker has a body provided with an aperture for receiving a pin, which can be inserted through the linker and into the aperture in the section to be raised.

The lower end of each section is preferably provided with a sill, which protrudes from  
15 the outer circumference of the section. The sill is preferably approximately 1 inch wide. The sill aids in stabilising the mast as it provides contact between a section and the corresponding lower section to reduce lateral movement between the sections, particularly when extended.

20 The sections of the mast are preferably moveable between the stored position to the elongated position one at a time. Once each section is fully extended it can preferably be locked in place. Any standard locking mechanism may be used. For example a bolt may be passed through an aperture in the top of a lower section and an aperture in the bottom of the upper section. Preferably the locking mechanism comprises a pin which  
25 is passed through an aperture in the top of a lower section and a corresponding aperture in an upper section. The sections are preferably provided with further apertures, which are diametrically opposite the first apertures allowing the pin to pass right through the mast.

30 The mast preferably further comprises a base, upon which the mast may be stood. The base may include handles to allow the mast to be easily moved. For the same purpose the base may also be mounted on wheels, particularly castors, or on a trolley. The base

is preferably at least 20 inches in length and width, more preferably 24 inches, to provide stability. For further stability the mast may be provided with guide wires for attachment to the ground or to a building.

- 5 The sections of the mast are preferably made of aluminium to make the mast reasonably light. The base is preferably made of steel for strength.

The inner section is preferably provided with a mounting for a camera or other device. The mounting is preferably rotatable and preferably can be controlled remotely to pan  
10 and tilt.

Preferably the mast also comprises a camera, particularly a video camera. The camera is preferably mounted on the inner section of the mast, more preferably via a rotatable mounting. Alternatively the mast may comprise a light, an infra red detector or a smoke  
15 or chemical pollutants detector, or other detection equipment.

The invention further provides an extendible mast comprising a plurality of telescopic sections, moveable between a stored position and an extended position, each section being provided with a longitudinal slot, and an aperture; the mast further comprising a  
20 chain and sprocket drive mechanism for extending the sections, the chain including a linker for connecting the chain to the section to be extended. The linker may comprise a body having an aperture. Preferably, a pin is inserted through linker aperture into the aperture in the section to be extended.

- 25 A specific embodiment of the invention will now be described by way of example only, with reference to the drawings in which:

Figure 1 shows a mast according to the invention in the stored position;

Figure 2 shows a mast according to the invention in a partially extended position; and

- 30 Figure 3 shows the mast of figure 2 with an alternative drive mechanism.

Referring first to Figure 1, the mast 5 comprises a plurality of telescopic sections 10a, 10b, 10c, and 10d. The sections 10a, 10b, 10c and 10d are cylindrical and are of decreasing diameter such that they fit inside one another as shown. The mast further comprises a base 12, which has handles, 14, so the mast may be easily carried. Each section 10a, 10b, 10c and 10d, except the innermost section 10d is provided with a longitudinal slot 16, which allows access to the inner sections 10b, 10c, and 10b for extending the mast. The longitudinal slots 16 of each section are aligned. The inner sections 10b, 10c and 10d are also provided with an aperture 17, which allows attachment of the section to a drive mechanism (not shown in Figure 1) which is used to extend the mast.

The aperture 17 of each section also aligns with the slot 16 in the outermost section 10a. This allows access to the apertures 17 to enable the sections to be lifted. Both the slots of each section and the apertures of each section may include corresponding slots or apertures on the diametrically opposite side of each section so that, as will be explained below, when a pin is inserted through an aperture 17, it passes through the opposite side of the mast. The mast can operate with or without the slots and apertures at the far side of the mast as appropriate. It will be appreciated that the slots in the sections allow the inner sections to be lifted since they allow access to the apertures 17 of the innermost sections.

Figure 2 shows the mast 5, in a partially extended position. The mast in Figure 2 has three sections, the innermost section, 10c has been fully extended. The sections are raised one at a time using a sprocket wheel 18 and chain 20 drive mechanism. The mechanism additionally includes an idler sprocket wheel 19 around which the chain passes. Thus, the chain 20 passes over the sprocket wheel 18 and the idler sprocket wheel 19. A handle 22 is provided to turn the sprocket wheel 18 and drive the chain. In the first embodiment the handle 22 is attached to the sprocket wheel 18. An alternative embodiment is shown in Figure 3.

The chain 20 includes a linker 34 to connect the chain to the section to be raised. The linker 34 includes an aperture through which a pin 36 can be passed. The pin 36 is then

inserted into the aperture 17 in the section to be raised connecting the linker and section.

Once a section is extended it is locked in place using a bolt 24 and aperture 26. The  
5 bolt 24 is passed through an aperture 26 in the top of the lower section 10b and aperture 26 in the bottom of the upper section 10c.

The sections are provided with a pin 24 and aperture 26 to lock each section into place when fully extended.

10

Figure 3 shows an alternative embodiment, in which a second drive chain 28 and a handle are provided. The sprocket wheel 18 which has been described in Figure 2 forms part of a transfer unit. In addition, the transfer unit includes a second sprocket wheel 30 which is connected to the main sprocket wheel 18. The two sprocket wheels  
15 are fixed together and rotate together. This means that, if the second sprocket wheel 30 is rotated, the main sprocket wheel 18 will also turn at the same speed. This turns the drive chain 20. The second drive chain 28 passes over the second sprocket wheel 30 and over a handle sprocket wheel 33 which is turned by a cranked handle. Thus, as the cranked handle is turned, the handle sprocket wheel 33 is turned which drives the  
20 second drive chain 28 around the second sprocket wheel 30 within the transfer unit. This in turn drives the main sprocket wheel 18 to move the chain 20. In this embodiment it is possible to include one or more gears by altering the size of the second sprocket 30 in comparison with the main sprocket. This can make extending the sections easier, particularly if the mast has a large number of sections.

25

A camera (not shown) is mounted to the inner section of the mast. The camera is mounted on a rotatable mounting and arranged to tilt and pan in order to survey an area. The mast is extended to the required height and the camera used to record the area under investigation.

30

In use, a camera is mounted onto the inner section 10c. The pin 36 is inserted through the linker 34 into the aperture 17 in the inner section 10c connecting the linker 34 to the

section 10c. The handle 22 is turned, driving the chain 20 and lifting the linker 34, and hence the section 10c. Once the section 10c is fully extended, the bolt 24 is inserted through apertures 26 in the bottom and top of the inner and middle sections (10c and 10b), respectively. The pin 36 is removed from the linker 34 and the handle 22 turned  
5 to lower the linker 34. It is then joined to the middle section 10b and that section raised in the same way.

Once the mast is fully extended guide wires, not shown, are used to tether the mast.

**Claims**

1. A freestanding, portable, extendible mast arranged to support a detection device, comprising a plurality of telescopic sections each being moveable between a stored position, and an extended position, wherein the mast is between 30 and 130 feet in length when all the sections are in the elongated position.
2. An extendible mast according to claim 1 which comprises between 5 and 8 sections.
3. An extendible mast according to claim 1 or 2, wherein the sections of the mast are moveable between the stored position and elongated position by hand.
4. An extendible mast according to any of claims 1 to 3, wherein the mast further comprises a drive mechanism for moving the sections between the stored and elongated positions.
5. An extendible mast according to claim 4 wherein the drive mechanism is a chain and sprocket wheel apparatus.
6. An extendible mast according to any preceding claim wherein the sections are moveable between the stored and extended positions, one at a time.
7. An extendible mast according to any preceding claim, further comprising a locking mechanism for locking sections in place once the sections have been moved from the stored position to the extended position.
8. An extendible mast according to any preceding claim further comprising a base.
9. An extendible mast according to any preceding claim upon which a camera is mounted.

10. An extendible mast comprising a plurality of telescopic sections, moveable between a stored position and an extended position, each section being provided with an longitudinal slot, and an aperture; the mast further comprising a chain and sprocket wheel drive mechanism for extending the sections, the chain including a linker for connecting the chain to the section to be extended.

11. The extendible mast according to claim 10 wherein the linker comprises a body and an aperture, and wherein use, a pin is inserted through the linker aperture into the aperture in the section to be extended.

12. An extendible mast substantially as described herein, with reference to the drawings.

**ABSTRACT**

**Extendible Mast**

- 5 The invention relates to a extendible mast, particularly for supporting a camera.

FIG 1

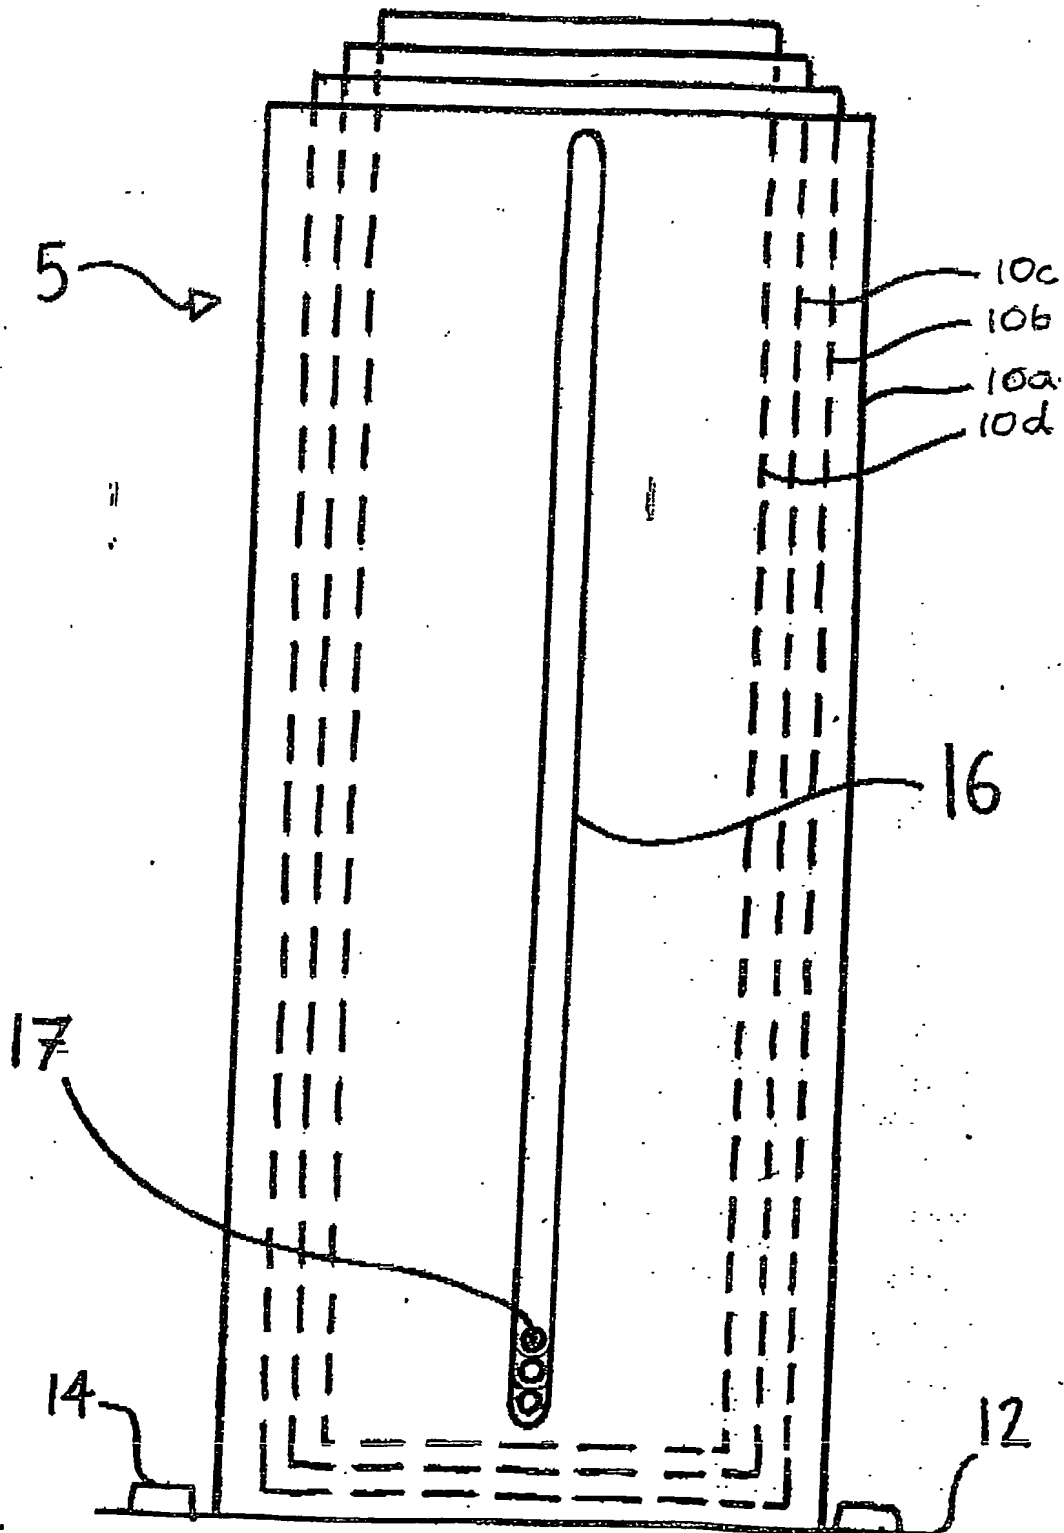


FIG 2

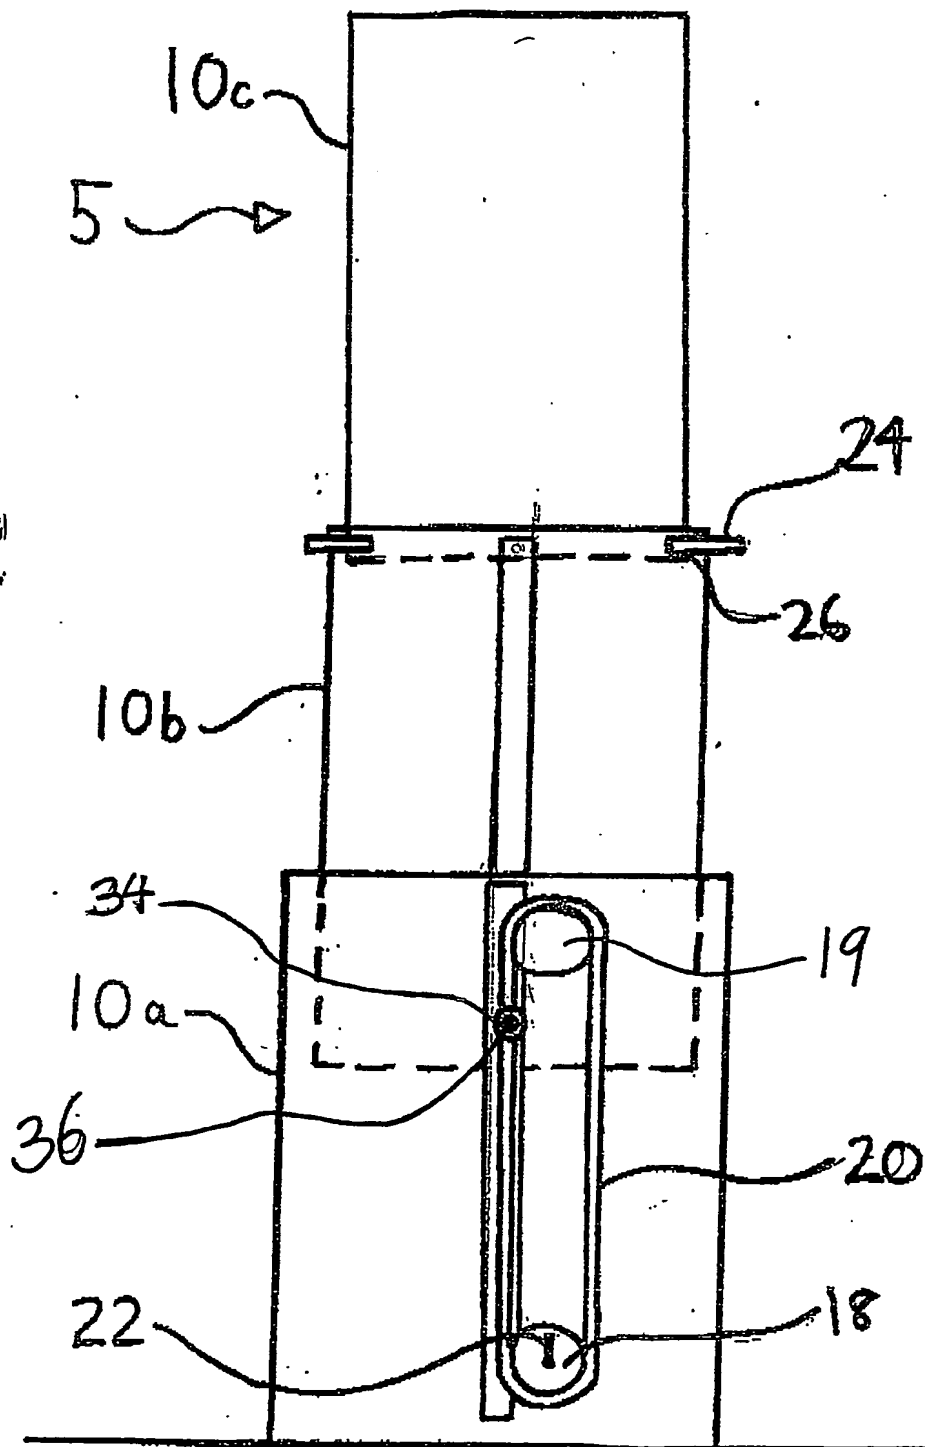


FIG 3

